



SALS OBRIEN

10202 Fifth Avenue NE, Suite 300
Seattle, WA 98125
P: 206.547.1540 | F: 206.547.8212
salsobrien.com




KORD S KURISU

ARCHITECT
P.O. BOX 22
MOUNTAIN VIEW, WA 98040
KORDSKURISU.COM

CONSULTANT

PROFESSIONAL SEAL

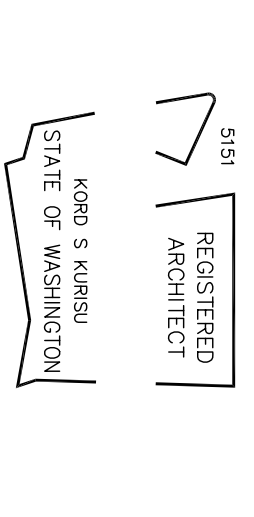

COPYRIGHT NOTICE

THIS DRAWING WAS PREPARED FOR USE ON A SPECIFIC DATE AND IS NOT SUITABLE FOR USE AT ANY OTHER DATE. THE USER OF THIS DRAWING FOR REFERENCE OR FOR ANY OTHER PURPOSE SHALL BE RESPONSIBLE FOR OBTAINING NECESSARY PERMITS AND SERVICES OF NECESSARY LICENSED PROFESSIONALS. THE USER OF THIS DRAWING SHALL BE RESPONSIBLE FOR OBTAINING NECESSARY PERMITS AND SERVICES OF NECESSARY LICENSED PROFESSIONALS. THE USER OF THIS DRAWING SHALL BE RESPONSIBLE FOR OBTAINING NECESSARY PERMITS AND SERVICES OF NECESSARY LICENSED PROFESSIONALS.

ISSUE SETS

ISSUE	DATE
BID SET	07/19/20

REVISIONS

NO.	DATE	DESCRIPTION

SNO-ISLE LIBRARIES
CLINTON LIBRARY
NEW ENTRY CANOPY
4781 DEER LAKE ROAD
CLINTON, WASHINGTON

PROJECT MANAGER:

CHECKED BY:

DATE:

DOCUMENT DATE:


SHEET NAME:

MISC. DETAILS


SHEET NO.

A-3


OF 3

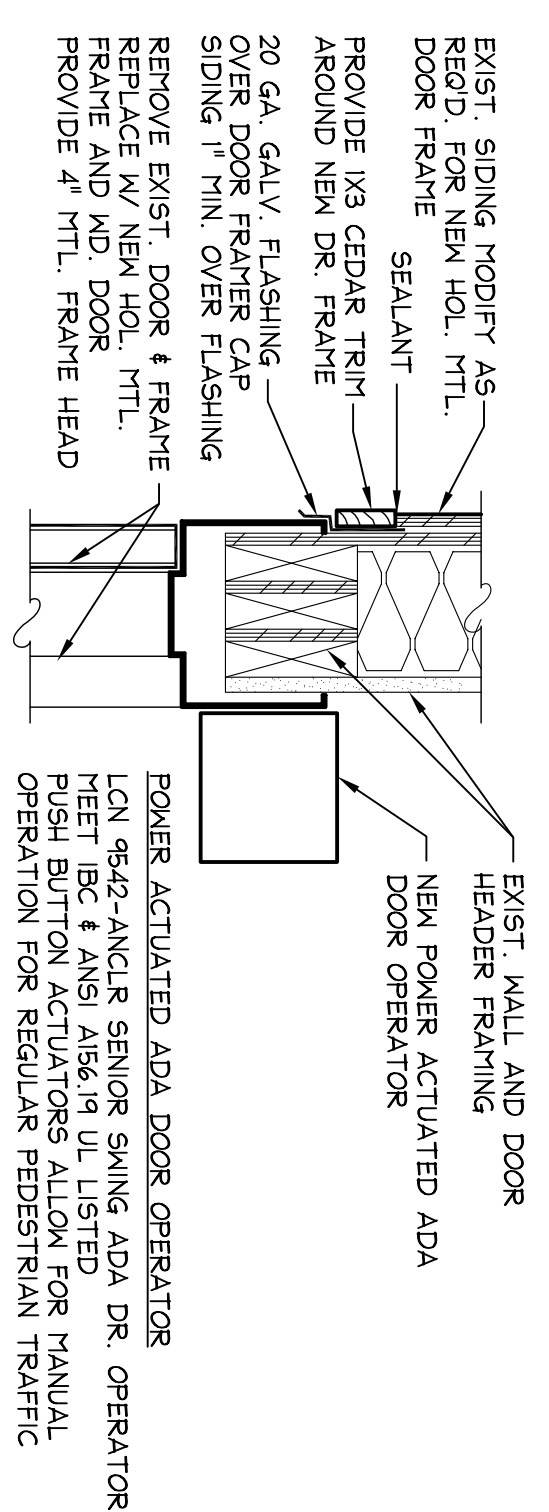


4 NEW DOOR HEAD (JAMB SIM.)
SCALE: 1 1/2" = 1'-0"

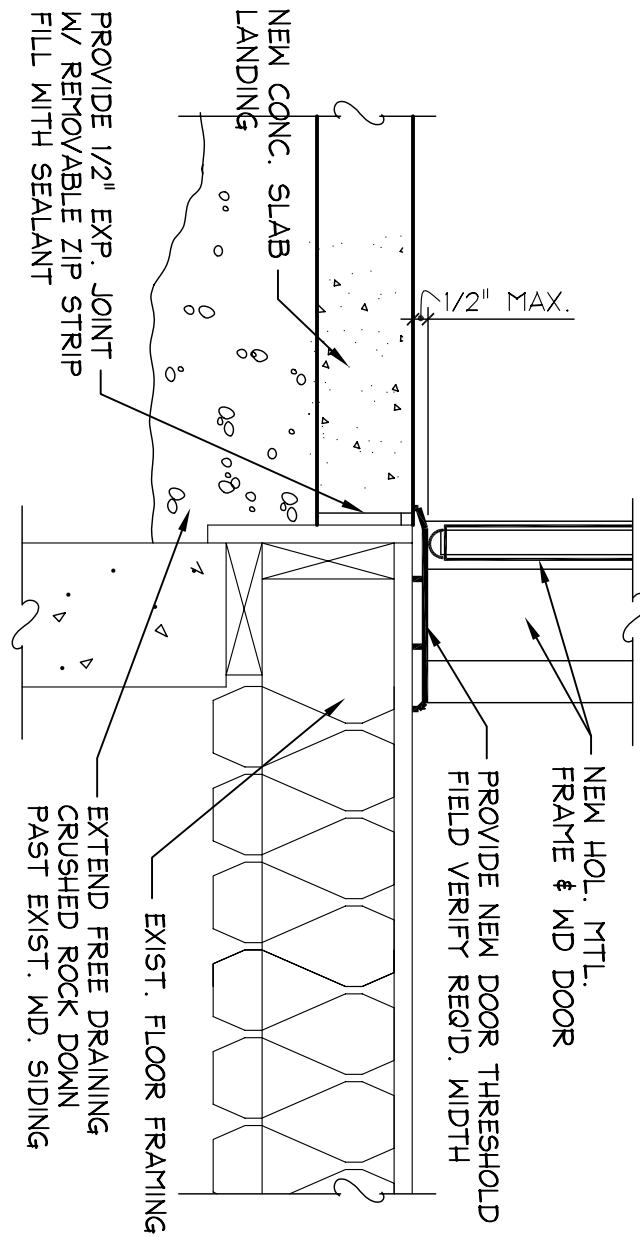


3 NEW THRESHOLD DETAIL
SCALE: 1 1/2" = 1'-0"

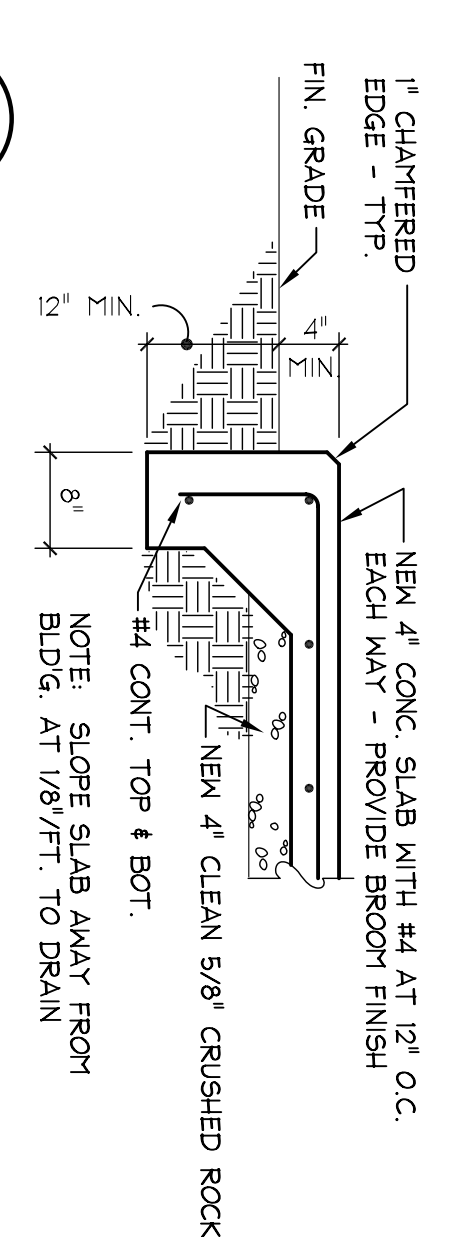

2 CONC. SLAB DETAIL
SCALE: 3/4" = 1'-0"

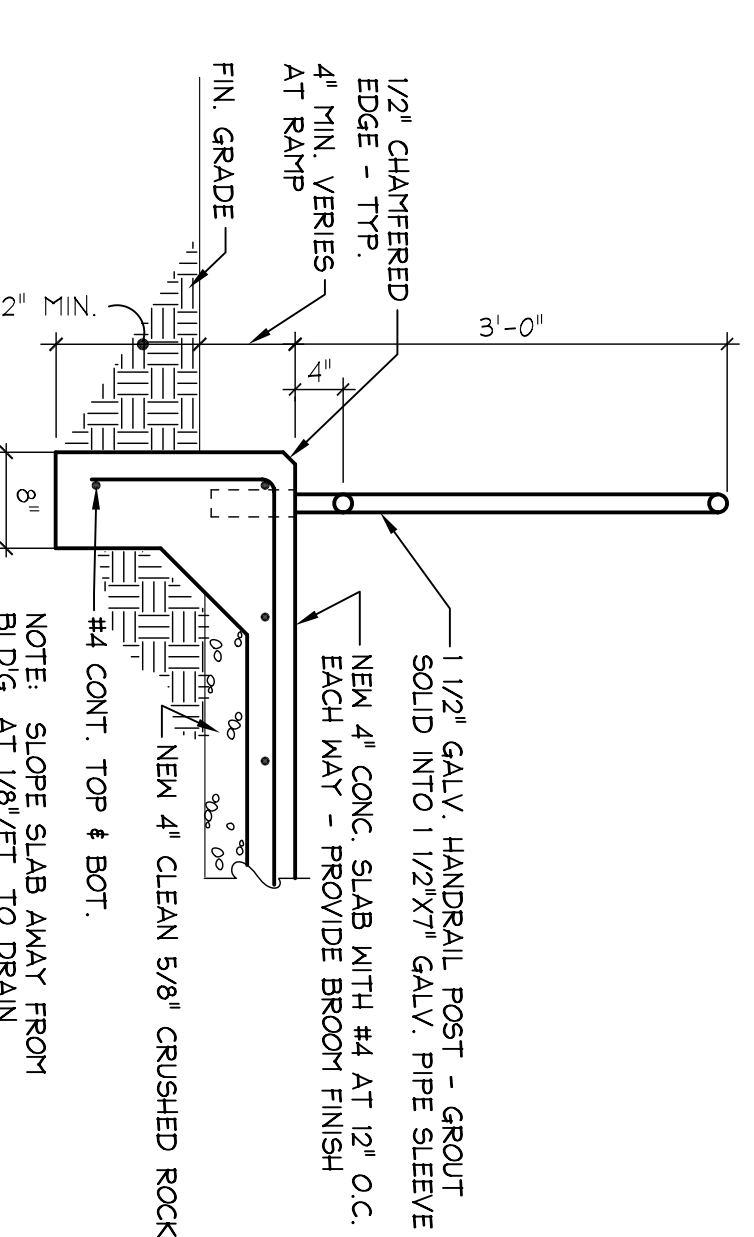


1 CONC. SLAB/RAMP EDGE DTL.
SCALE: 3/4" = 1'-0"

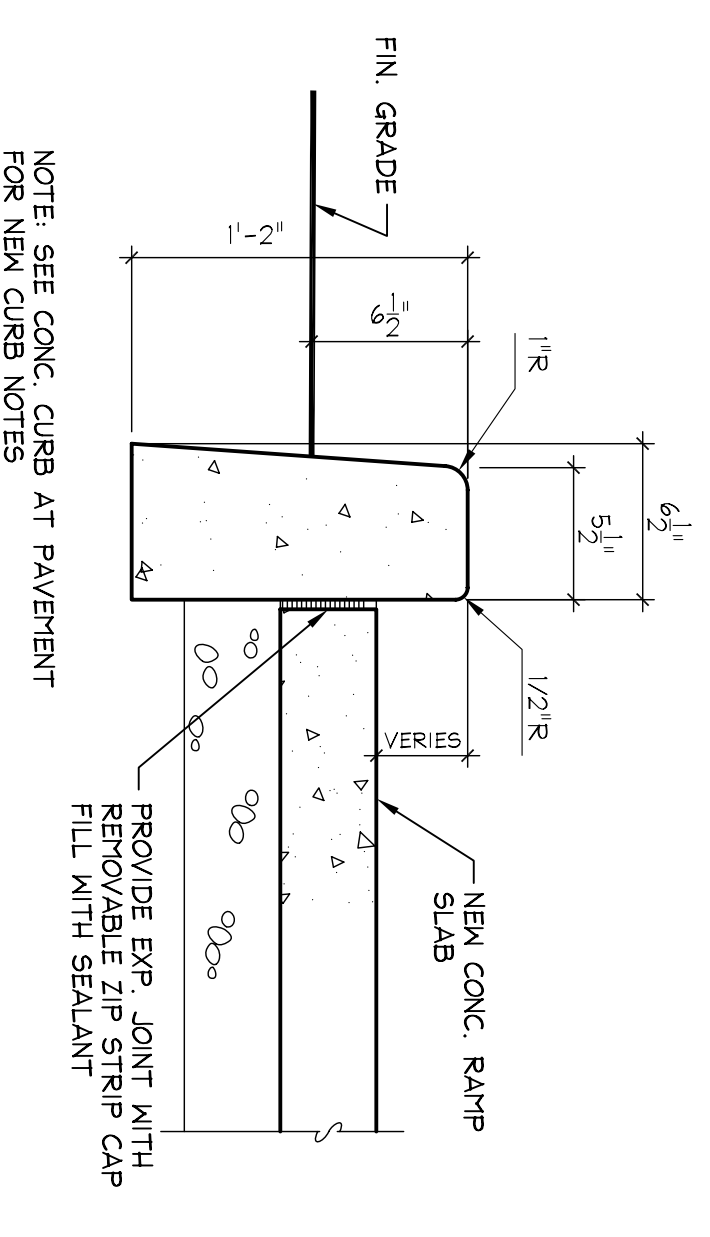


7 NEW CONC. CURB @ RAMP
SCALE: 1 1/2" = 1'-0"

- CURB NOTES:**
- CONSTRUCTION OF CURB DETAILS SHALL BE IN ACCORDANCE WITH THE STANDARD SPECIFICATIONS FOR ROAD, BRIDGE, AND TUNNELL CONSTRUCTION AS PUBLISHED BY THE WASHINGTON STATE DEPARTMENT OF TRANSPORTATION. THE USER OF THIS DRAWING SHALL BE RESPONSIBLE FOR OBTAINING NECESSARY PERMITS AND SERVICES OF NECESSARY LICENSED PROFESSIONALS. THE USER OF THIS DRAWING SHALL BE RESPONSIBLE FOR OBTAINING NECESSARY PERMITS AND SERVICES OF NECESSARY LICENSED PROFESSIONALS.
 - ALL CONCRETE CURBS AND SIDEWALKS SHALL BE AIR ENTRAINED CONCRETE CLASS 3000.
 - FORMS SHALL BE TRUE TO LINE AND GRADE AND SECURELY STAKED. STEEL FORMS ONLY SHALL BE USED ON TANGENT SECTION. WOOD FORMS MAY BE USED ON CURBED SECTIONS.
 - FULL DEPTH EXPANSION JOINTS CONSISTING OF 3/8" MIN. PREPOLYMERIZED JOINT MATERIAL SHALL BE PLACED ADJACENT TO CATCH BASINS, METS AND AT POINTS OF TANGENT ON STREETS AND DRIVEWAY RETURNS. TANGENT STRAKING SHALL BE 20 FEET.
 - CONTRACTION JOINTS (DUMPT JOINTS) CONSISTING OF 3/8" MIN. X 2" OF PREPOLYMERIZED JOINT MATERIAL SHALL BE CONSTRUCTED AT INTERVALS OF 10 FEET.
 - ALL JOINTS SHALL BE CLEANED AND EGGED.
 - FINISH SHALL BE A LIGHT BROOK FINISH.
 - FINISHED CURBS SHALL BE SPRAYED WITH A CLEAR CURING COMPOUND.

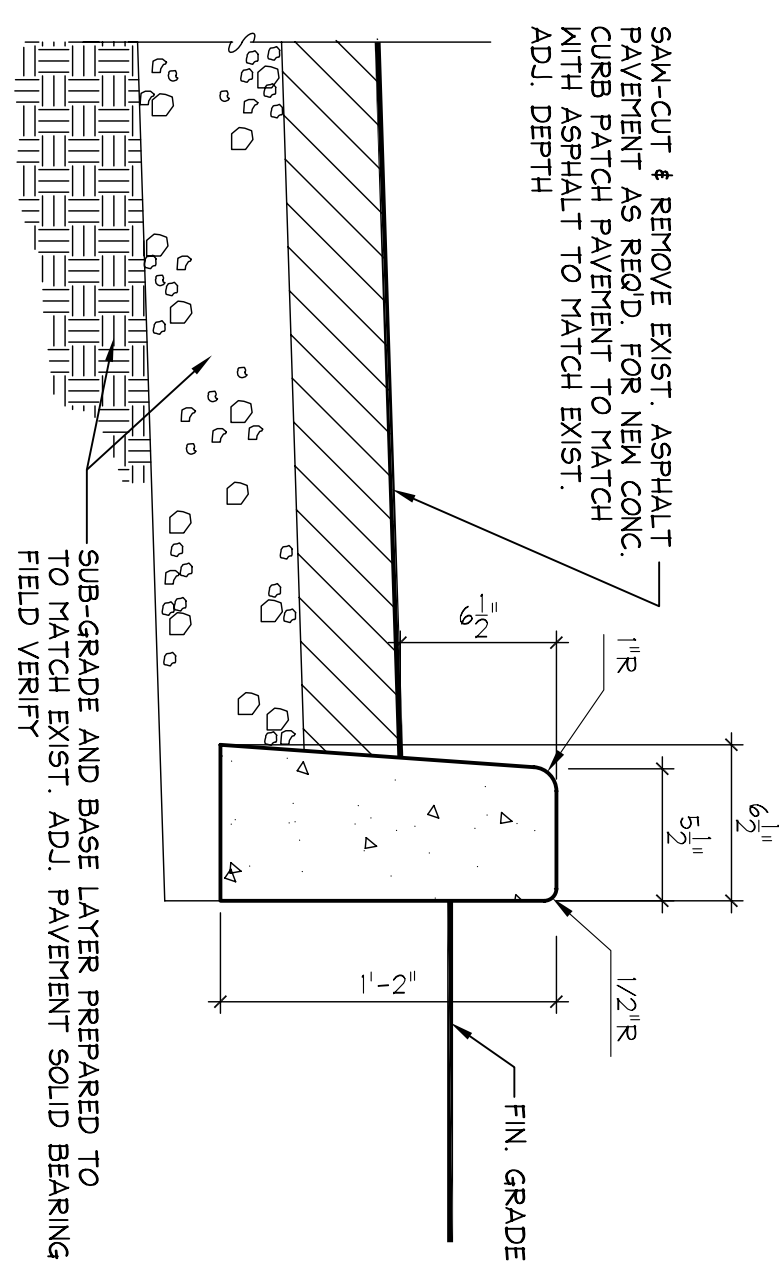

6 CONC. CURB @ PAVEMENT
SCALE: 1 1/2" = 1'-0"

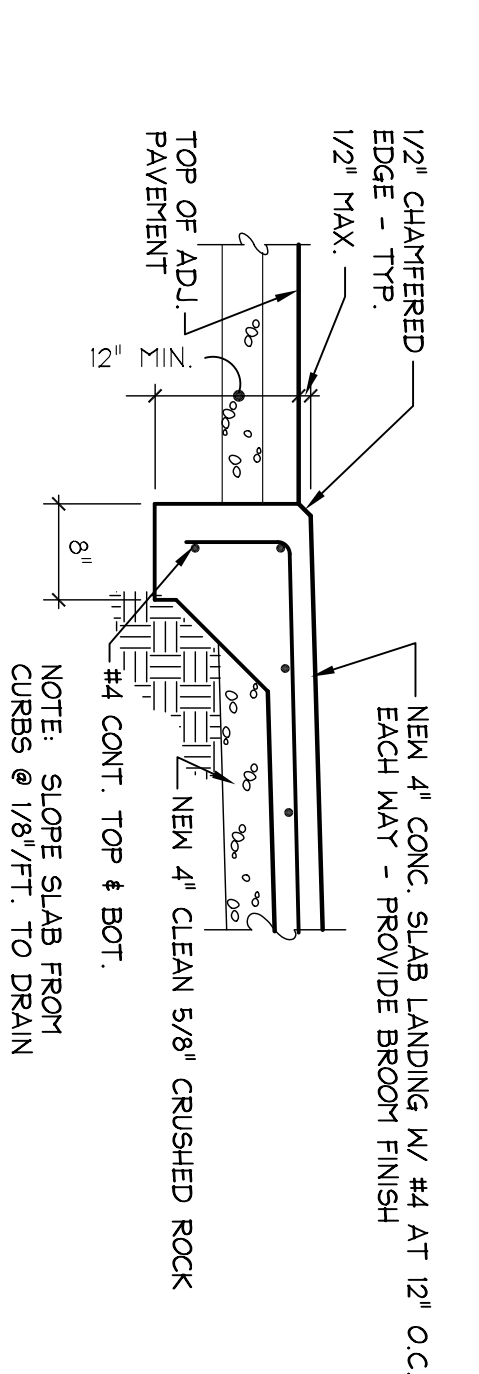

5 NEW CONC. RAMP EDGE DTL.
SCALE: 3/4" = 1'-0"