




Addendum 2

MONROE ROOF & GUTTER REPLACEMENT ITB

ITB NO. 2020.09.29

1. UPDATES – October 15, 2020

- The bid deadline was wrong in the Addendum 1 email sent out 10/13/20. **Bids are due by 5:00pm (Pacific local time), Tuesday, October 20, 2020.**
- **Q:** On detail 3 on A-3 concerning window flashing: Are all windows to be removed to install new 22 gauge flashing? If so, we will need to coordinate another site visit to address windows.
A: We do not need to remove the windows as they are set up high enough. We are only asking for the new 22 gauge flashing where the modification of existing wall panels is happening to support the 8" minimum rise.

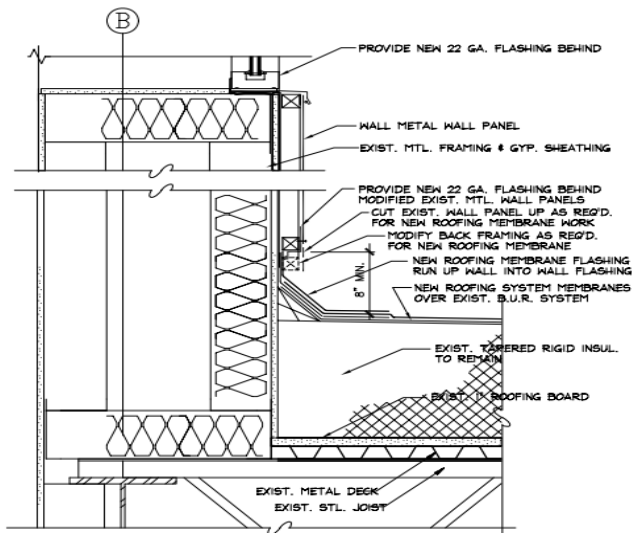

ROOFING NOTES:

1. IF REQ'D, REMOVE EXISTING B.U.R. SYSTEM FLASHING MEMBRANES FOR NEW ROOFING SYSTEM FLASHING MEMBRANES. VERIFY WITH NEW SYSTEM MANUF. WRITTEN INSTRUCTIONS.
2. VERIFY WITH ROOFING MANUF. STANDARD DETAILS AND MANUF. WRITTEN RECOMMENDATIONS FOR NEW ROOFING SYSTEM MEMBRANES SYSTEM OVER EXIST. B.U.R. ROOFING SYSTEM.

3 NEW ROOFING @ EXIST. SIDE WALL
SCALE: 1 1/2" = 1'-0"

END OF ADDENDUM